# EPIC™ GLOBAL SYSTEM

BEYOND THE LIMITS!

# EPIC'S EP-TOUCH1 DMX CONTROLLER

The EP-TOUCH-1 isa complete stand alone wall-mounted DMX controller is the perfect answer to interior lighting control expectations. Along with a state of the art design, the product comes with amazing features such as 1024 DMX channels, touch sensitive panel, clock/calendar, remote control, Ethernet facilities, and much much more....

## FEATURES

| | |
|---|---|
| Package | Interface, sdcard, datasheet, cdrom, usb cable |
| Software | ESA + ESA PRO on PC/Windows, ESA2 on PC + MAC |
| Application | ARCOLIS + EP-TOUCH REMOTE on  iPhone/iPad/Android |
| Available colors | Frame (black or white), use the Stick Design Configurator web site |
| Options | Dedicated remote control (*), Power supply (*) |
| Standards | EC, EMC, ROHS, ETL, UL (some are in process) |
| Image size | Standard 150x110mm picture, contact us for a sample profile |
| Temperature | -10ºC to 50ºC |
| Dimensions | 6.6 x 5 x 0.45 in  Complete package  9.8 x 5.9 x 2.17 in |
| Weight | 0,2 kg  0.44 lbs      Complete package  0,6 kg  1.32 lbs |

| SPECIFICATIONS / CONNECTIONS | | Built-in features | screw-terminal rear connector (9 pins) | extension socket rear connectors (2x10 pins) | front access connections (open cover) |
|---|---|---|---|---|---|
| Power Supply | 9V DC 0.65A, supplied• | | | | USB |
| DMX Output #1 | First universe, 512 channels DMX512 output | | •• | | |
| DMX Output #2 | Second universe, 512 channels DMX512 output (*) | | | • | |
| USB | USB 2.0 communication for PC/software | | | | • |
| Ethernet | Advanced networking features | • | | | |
| Ports 1,2,3,4 | 4 Contact closure inputs, connect to ground for operating | | •• | | |
| Ports 5,6,7,8 | 4 Contact closure inputs, connect to ground for operating | | | • | |
| User interface | 14 buttons, 1 fader, 28 leds (Touch-sensitive keypad)• | | | | power/data leds |
| SDCARD | Micro sd card for stand alone memory use (supplied) | | | | • |
| RESET | Push button for reset operation | | | | • |
| RS232 | RS232 Serial communication for external synchronisation | | | • | |
| Output relay | Automatic Stand by 5V signal | | | • | |
| Clock | Real time clock and calendar, 10 minutes saving without power | • | | | |
| Infrared receiver | Easy learning triggering from any 36Khz remote control• | | | | |
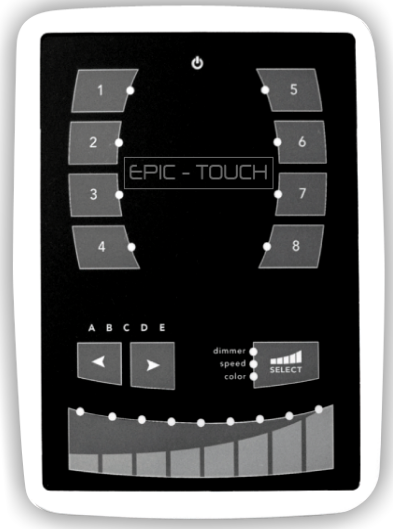
# Ordering Information

PRODUCT

EP-TOUCH-1

PRINT     SEND